




# CANOPY LIGHT 80W

CE


IP66

ALIM.  
MW  
MEAN WELL

60.000  
HEURES

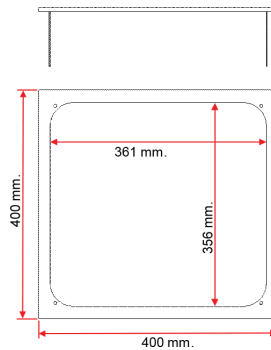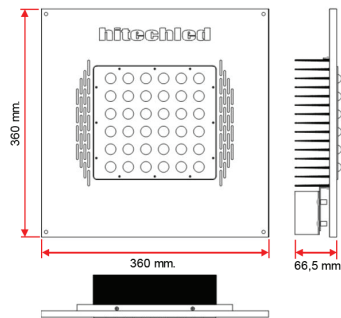

Staffa di fissaggio  
Mounting Bracket

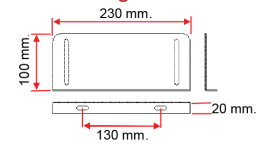

Code	Couleur	LED	Flux lumineux	IRC	Voltage	Angle de diffusion
<b>HTLUXC-80</b>	4000-5700k	Nichia	10140lm	75	90-304VAC	90°-60°x120°-120°

h	E Max.	E Average	Area	a1	a2	b1	b2
1 m.	4517,8 Lux	888,0 Lux	10,7 m2	2,5 m.	2,5 m.	2,6 m.	2,6 m.
2 m.	1129,4 Lux	222,0 Lux	42,8 m2	5,0 m.	5,0 m.	5,3 m.	5,3 m.
3 m.	502,0 Lux	98,7 Lux	96,3 m2	7,5 m.	7,5 m.	7,9 m.	7,9 m.
4 m.	282,4 Lux	55,5 Lux	171,1 m2	10,0 m.	10,0 m.	10,5 m.	10,5 m.
5 m.	180,7 Lux	35,5 Lux	267,4 m2	12,5 m.	12,5 m.	13,2 m.	13,2 m.

